



## EV LADEKABELOPRULLER 11 KW TIL ELBIL

### BRUGSVEJLEDNING



Varenr. 857050+857052

#### VIGTIGT!

Brugsvejledningen skal læses omhyggeligt igennem inden dette produkt tages i brug.

Du skal sikre dig, at installationen og brug udføres korrekt for at undgå overophedning af kablet.

Uautoriseret brug kan afstedkomme alvorlige skader.

Opbevar vejledningen så den kan læses, hvis det bliver nødvendigt.



## KORREKT BRUG

Brug kun EV-ladekabeloprulleren, når den er i fejlfri teknisk stand, og overhold alle sikkerheds- og advarselsanvisninger i denne brugsvejledning. Hvis der opstår en sikkerhedsrelevant fejlfunktion, skal brugen straks ophøre. Ændringer eller ombygninger, herunder anvendelse af ikke-godkendte stiktyper eller overbelastning af sikkerhedsrelevante komponenter, er ikke tilladt.

Varenummer	857050 + 857052
Ladestrøm	16 A
Effekt - kablet rullet ud	11 kW
Effekt - kablet rullet ind	7 kW
Tilslutningsspænding	400 V
Kabellængde - biltilslutning	5 m eller 8 m
Kabellængde - boxtilslutning	2 m
Ladestik	Type 2
Kabeltype	H07BZ5-F
Beskyttelsesklasse	IP44
Vægt	7 kg

## SIKKERHEDSINSTRUKSER

- Kontroller kablerne for skader før hver brug.
- Foretag ingen ændringer på enheden.
- Hold enheden væk fra varmekilder.
- Træk i stikket for at frakoble enheden fra ladeboksen i stedet for at trække i kablet.
- Træk ikke kablerne over skarpe kanter eller genstande.
- Undgå mekanisk belastning.
- Undgå at køre over kablet.
- Sæt ikke rullen i vand.
- Udfør ikke selvstændige reparationer på produktet. Kontakt en kvalificeret elektriker eller din forhandler.
- Brug kun enheden under de godkendte og passende omgivelsesbetingelser.
- Arbejd ikke med enheden i eksplosiv atmosfære.
- Brug ikke enheden, hvis du er under indflydelse af medicin, alkohol eller narkotika.
- Dæk ikke enheden til. Der er risiko for brand på grund af varmeophobning.
- Hold enheden væk fra børn.



## FORKERT ANVENDELSE

- Ændringer eller modificeringer af kabeloprullerens konstruktion er ikke tilladt.
- Kabeloprulleren må ikke anvendes uden for de angivne driftsgrænser.
- Drift uden de tilsigtede beskyttelsesanordninger er ikke tilladt.
- Beskyttelsesanordninger må ikke afmonteres, omgås eller sættes ud af funktion.
- Enheden må aldrig efterlades uden opsyn, især ikke i nærheden af børn.

## MONTERING

Montering på væg eller loft er muligt. Når du vælger installationsstedet, skal du sikre dig, at overfladen er stabil, at kablet kan rulles frit ud og ind og at fastgørelsesmaterialet svarer til belastningen fra vægt og trækraft.

Ved installation i loft skal du sikre dig, at der er tilstrækkelig plads til overholde betjeningen angivet.


Oprulleren skal installeres i overensstemmelse med gældende regler og standarder for elektriske systemer og arbejdspladsregler.

Efter installationen skal type 2-stikket sættes i en passende type 2-stikkontakt på en ladeboks.

Tilslutningskablet **må kun** tilsluttes direkte i vægboksen.

Tilslutningskablet **må ikke** afsluttes med eller forbindes via et type 2-stik.

Efter montering og elektrisk tilslutning skal en funktionskontrol gennemføres.

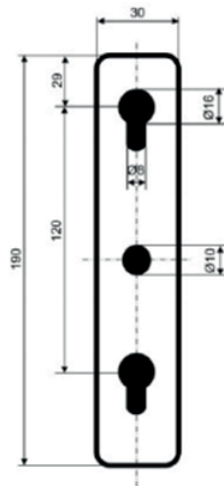

## BETJENING

- Kontrollér kabeloprulleren ved langsomt at trække kablet ud. Efter hver halve omdrejning af tromlen høres en kliklyd.
- For at rulle kablet tilbage trækkes kablet, indtil det næste klik høres, hvorefter kablet slippes med et kort, hurtigt træk.
- Sørg for, at kablet ikke rulles ukontrolleret tilbage, men før det kontrolleret tilbage med hånden. Ukontrolleret oprulning kan medføre personskaade eller materiel skade.
- **For at undgå overophedning skal kablet altid trækkes helt ud af kabeloprulleren til det markerede punkt på kablet.**

## NOTE! AUTOMATISK TEMPERATURBESKYTTELSE

Kabeloprulleren er udstyret med en automatisk temperaturbeskyttelse. Ved overophedning reduceres den tilladte effekt automatisk. Når temperaturen falder igen, frigives effekten automatisk.



## **VEDLIGEHODELSE**

- Kontrollér, at kablet ikke er beskadiget. Et beskadiget kabel kan medføre risiko for elektrisk stød.
- Anvend egnede rengøringsmidler til fjernelse af snavs og affald fra kablet.
- Ved vedligeholdelse af elektriske eller mekaniske dele samt ved udskiftning af kablet skal der kontaktes en autoriseret elektriker
- Demontering af kabelprulleren må kun udføres af kvalificeret personale. Udførelse af uuddannet personale kan medføre personskaade.



# EV CHARGING CABLE REEL 11 KW FOR ELECTRIC VEHICLES

## INSTRUCTION MANUAL



Item no. 857050+857052

### IMPORTANT!

- Read this user manual carefully before using the product.
- Ensure correct installation and operation to prevent overheating of the cable.
- Unauthorized use may cause serious injury or damage.
- Retain this manual for future reference.



## CORRECT USE

Only use the EV charging cable reel when it is in flawless technical condition and comply with all safety and warning instructions in this user manual. If a safety-relevant malfunction occurs, discontinue use immediately. Modifications or alterations, including the use of non-approved connector types or overloading of safety-relevant components, are not permitted.

Item no.	857050 + 857052
Charging current	16 A
Output power - cable fully extended	11 kW
Output power - cable retracted	7 kW
Supply voltage	400 V
Cable length - vehicle connection	5 m or 8 m
Cable length - charging box connection	2 m
Charging connector	Type 2
Cable type	H07BZ5-F
Protection class	IP44
Weight	7 kg

## SAFETY INSTRUCTIONS

- Check the cables for damage before each use.
- Do not make any modifications to the device.
- Keep the device away from heat sources.
- Disconnect the device from the charging box by pulling the plug, not the cable.
- Do not pull the cables over sharp edges or objects.
- Avoid mechanical stress.
- Avoid driving over the cable.
- Do not immerse the cable reel in water.
- Do not carry out repairs on the product yourself. Contact a qualified electrician or your dealer.
- Only use the device under approved and suitable environmental conditions.
- Do not operate the device in an explosive atmosphere.
- Do not use the device if you are under the influence of medication, alcohol, or drugs.
- Do not cover the device. There is a risk of fire due to heat accumulation.
- Keep the device out of reach of children.



## IMPROPER USE

- Changes or modifications to the construction of the cable reel are not permitted.
- The cable reel must not be used outside the specified operating limits.
- Operation without the intended protective devices is not permitted.
- Protective devices must not be removed, bypassed, or deactivated.
- The device must never be left unattended, especially in the presence of children.

## INSTALLATION

Installation on a wall or ceiling is possible. When selecting the installation location, ensure that the surface is stable, that the cable can be extended and retracted freely, and that the mounting hardware is suitable for the load resulting from weight and pulling force.

When installing on the ceiling, ensure that there is sufficient clearance to comply with the specified operating requirements.


The cable reel must be installed in accordance with applicable regulations and standards for electrical systems and workplace safety.

After installation, the Type 2 connector must be inserted into a suitable Type 2 socket on a charging box.

The connection cable **may only** be connected directly to the wall-mounted charging box.

The connection cable **must not** be terminated with or connected via a Type 2 connector.

After installation and electrical connection, a functional test must be carried out.

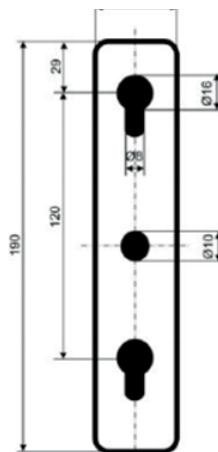

## USER INSTRUCTIONS

- Check the cable reel by slowly pulling out the cable. After each half rotation of the drum, a clicking sound can be heard.
- To retract the cable, pull the cable until the next click is heard, then release it with a short, quick pull.
- Ensure that the cable is not retracted in an uncontrolled manner, but guide it back by hand. Uncontrolled retraction may result in personal injury or damage to property.
- **To prevent overheating, the cable must always be fully extended from the cable reel to the marked point on the cable.**

## NOTE! AUTOMATIC TEMPERATURE PROTECTION

The cable reel is equipped with automatic temperature protection. In the event of overheating, the permitted power is automatically reduced. When the temperature decreases again, the power is automatically restored.



## **MAINTENANCE**

- Check that the cable is not damaged. A damaged cable may pose a risk of electric shock.
- Use suitable cleaning agents to remove dirt and debris from the cable.
- For maintenance of electrical or mechanical components, as well as for replacement of the cable, a certified electrician must be contacted.
- Disassembly of the cable reel may only be carried out by qualified personnel. Work performed by untrained personnel may result in personal injury