



 Owner:
 Knudsen Kilen A/S

 No.:
 MD-25148-EN

 Issued:
 19-09-2025

 Valid to:
 19-09-2030

3rd PARTY **VERIFIED** 

EPD

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804







#### Owner of declaration

Knudsen Kilen A/S Industrivej 21, DK 3300 Frederiksværk

**EPD** version

Version 1.0: 19-09-2025: First publication



VAT no. 87 43 28 15 Knudsenkilen.dk Programme **K**epddanmark **EPD** Danmark www.epddanmark.dk ☐ Industry EPD ☑ Product specific □ Average ☐ Worst Case Declared product(s) K-Wall 50i Number of declared datasets/product variations: 1 **Production site** Knudsen Plast s.r.o Herlianska 547 SK 093 03 Vranov nad Topľou □Cradle-to-gate with options **Use of Guarantees of Origin** ☐ No certificates used ⋈ Electricity covered by GoO ☐ Biogas covered by GoO Declared/ functional unit 1 kg of Knudsen Kilen K-Wall Year of production site data (A3) 2024

Issued: Valid to: 19-09-2025 19-09-2030

#### **Basis of calculation**

This EPD is developed and verified in accordance with the European standard EN 15804+A2.

#### Comparability

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

#### **Validity**

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

#### **EPD** type

□Cradle-to-gate with options, modules C1-C4 and D □Cradle-to-grave and module D □Cradle-to-gate

CEN	standard	ΕN	15804	serves	as	the	core	PCR

Independent verification of the declaration and data, according to EN ISO 14025

□ internal

Third party verifier:

Carp

Guangli Du

Martha Katrine Sørensen

Life	cycle	stage	es and	d mod	ules (	(ND =	Not	declar	red)							
	Produc	t		ruction cess		Use			End of life			Beyond the system boundary				
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	А3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D
X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	x



### Product information

#### **Product description**

This EPD covers Knudsen Kilen K-Wall which is mainly made of ABS plastic. The ABS in the product is both pre- and post-consumer regrind material. The declared unit is 1 kg. In this declaration an overview of the weight per piece of the K-Wall 50i element is shown. The EPD covers all the production of the K-Walls in Slovakia, which are made for the Danish market. The main material components for the declared product are listed in the table below.

Material	Weight-% of declared product
ABS Regrind (pre-consumer)	89.1
ABS Regrind (post-consumer)	9.9
Masterbatch Irganox 1010	1.0

#### **Product packaging:**

The composition of the sales- and transport packaging of the product is shown in the table below.

Material	Weight of packaging material (kg)	Weight-% of packaging				
Wooden pallet	0.155	66.8				
Cardboard	0.076	32.7				
Plastic (PE)	0.001	0.5				
Total	0.232	100				

#### Representativity

This declaration, including data collection and the modeled foreground system including results, represents the production of Knudsen Kilen K-Wall at a manufacturing site located in Slovakia. Product specific data are based on average values collected of the production of the product in the year 2024. Background data are based on datasets from Ecoinvent 3.10 and are in general less than 10 years old. Generally, the used background datasets are of high quality, and the

majority of the datasets are only a couple of years old. The data also has good presentiveness geographically with many of the processes being on a national specific basis or matching the region.

#### **Hazardous substances**

The Knudsen Kilen K-Wall does not contain substances listed on the "Candidate List of Substances of Very High Concern authorisation"

#### (http://echa.europa.eu/candidate-list-table)

#### Product(s) use

The K-Wall is used in connection with the fitting of door- and window frames, where there is a need for firm and strong support for frame screws. K-Wall is made of ABS plastic and thus does not form thermal bridges such as e.g. metal fittings do. K-Wall is particularly suitable for allowing doors and windows to slide forward during external re-insulation processes. The products are permanently integrated in the building as a part of the building. Thus, the declared product is fulfilling the definition of a construction product and the LCA can be calculated according to EN15804+A2 and is in compliance with EPD Denmark's general program instructions (EPD Danmark, 2020).

#### **Essential characteristics**

Further technical information can be obtained by contacting the manufacturer or on manufacturer's website:

#### knudsenkilen.dk

#### Reference Service Life (RSL)

Since the life cycle modules for the use phase are not included in this EPD, a reference service life (RSL) for the product is not relevant or applicable in this case and is therefore not specified.



**Picture of product(s)** 

#### K-Wall 50i ABS



### Weight and conversion factor of Knudsen Kilen K-Wall 50i

Product and product no.	Weight per piece [g]	Conversion factor to 1 kg
K-Wall 50i - product no. 986902120	107.5	9.30





### LCA background

#### **Declared unit**

The LCI and LCIA results in this EPD relates to the declared unit of 1 kg of the product Knudsen Kilen K-Wall. The K-Wall is used in the fittings of windows and doors with a minimal heat conductivity.

Name	Value	Unit
Declared unit	1	kg
Density	1050	kg/m³

#### **Functional unit**

Not defined.

#### **PCR**

This EPD is developed according to the core rules for the product category of construction products in EN 15804:2012+A2:2019.

#### **Conversion factors**

The declared product comes in different product types, sizes and shapes as described. Thus, the declared unit (DU) is 1 kg of Knudsen Kilen K-Wall. In the declaration an overview table is provided to show the weight per piece of the Knudsen Kilen K-Wall. In addition, there are also provided conversion factors from pieces to 1 kg of K-Wall.

#### **Energy modelling principles**

#### Foreground system:

The product is produced using a mix of renewable energy sources with GO's at Knudsen Kilen's own internal manufacturing site in Slovakia: Biomass, Hydro, Gaseous fuel, and Wind power.

Information about the energy mix in the foreground system:


Energy mix	EF	Unit
GO's for internal mix	0.119	kg CO₂e/kWh

#### Background system:

Upstream processes are modelled using national energy mixes. Downstream processes are modelled using national energy mixes.



#### **Flowdiagram**

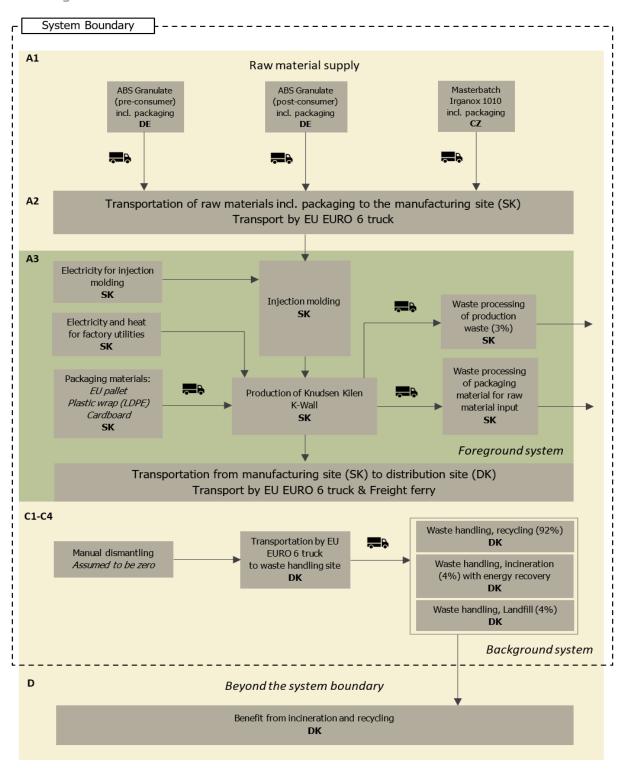



#### **System boundary**

This EPD is based on a cradle-to-gate LCA, in which 100 weight-% has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

#### Product stage (A1-A3) includes:

A1 - Extraction and processing of raw materials

A2 - Transport to the production site

A3 - Manufacturing processes

The product stage includes raw materials as input material, transport of the raw material to the manufacturer's production site in Slovakia, electricity for plastic injection molding machines and utilities at the factory site, packaging materials for the finished declared product as well as waste processing of the material waste in production and the raw materials' packaging materials up to the "end-of-waste" state or final disposal, according to EN15804+A2 §6.3.5.2. In the production of 1 kg Knudsen Kilen K-Wall waste of 3% occurs in the production in module A3.

Once the product has been injection molded, the product is packaged with packaging materials consisting of EU pallets (wood), cardboard, and plastic wrap (PE). All these packaging materials are also included in the product stage in module A3. The EU pallets (wood) are assumed reused 25 times before disposal. Thus, the modelling has been done accordingly with 1/25 virgin material input and 24/25 secondary input material. For the packaging materials in A3 the biogenic carbon content from renewable materials (cardboard and wood), is calculated based on the standard EN16485 as 0.5 kg C/kg dry matter. The cardboard has a moisture content of 7.5% and the wood has a moisture content of 15%. The biogenic carbon content is calculated from 100% of the material weight input. There is no biogenic carbon content in the declared product leaving the system boundary.

In the production stage the transportation from the manufacturing site in Slovakia to the distribution facility in Frederiksværk, Denmark is also included. The production of the declared product Knudsen Kilen K-Wall is in Slovakia at Knudsen Kilen's own internal manufacturing site. At the internal manufacturing site, the electricity is with green electricity certificates (GoO = Guarantee of Origin).

The product consists of various plastic material input with both pre-consumer and post-consumer ABS granulate.

# Construction process stage (A4-A5) includes:

Modules not declared.

#### Use stage (B1-B7) includes:

Modules not declared.

#### End of Life (C1-C4) includes:

Module C1 is assumed to be zero using manual dismantling.

In C2, the transport distance scenario is set to 50 km by truck based on a Danish national scenario.

In module C3-C4 the plastic is modelled with a waste treatment of 92% recycling, 4% incineration and 4% landfill which is the general assumption for the K-Wall. This waste scenario is based on national Danish waste statistics.

### Re-use, recovery and recycling potential (D) includes:

To calculate the amount of net-scrap for credit in module D, the secondary input material in A1 has been deducted from the amount of material for recycling and incineration credit in module D.

The raw material inputs are pre- and post-consumer scrap material. For the pre-consumer plastic material, a monetary cost factor has been used to allocate the share of new material assumed in the regrind granulate. This cost factor applies in the material input in A1 but also in the material input in the D module which can achieve credit. The crediting only applies for the 92% of recycled material and the energy recovery of the 4% which get incinerated in C3.





# LCA results

		ENVIF	RONMENT	AL IMPAC	TS PER 1 I	kg of Knud	lsen Kilen	K-Wall		
Indicator	Unit	A1	A2	А3	A1-A3	C1	C2	СЗ	C4	D
GWP-total	kg CO₂ eq.	1,53E+00	1,72E-01	7,43E-01	2,44E+00	0,00E+00	9,51E-03	1,83E-01	3,69E-03	-1,36E+00
GWP-fossil	kg CO₂ eq.	1,51E+00	1,72E-01	6,16E-01	2,30E+00	0,00E+00	9,50E-03	1,77E-01	3,69E-03	-1,35E+00
GWP-biogenic	kg CO₂ eq.	1,83E-02	1,19E-04	9,95E-02	1,18E-01	0,00E+00	6,58E-06	5,57E-03	4,62E-06	-7,86E-03
GWP-luluc	kg CO₂ eq.	6,54E-05	5,71E-05	2,77E-02	2,78E-02	0,00E+00	3,15E-06	3,67E-04	8,01E-08	-6,08E-05
ODP	kg CFC 11 eq.	2,33E-09	3,42E-09	1,62E-08	2,20E-08	0,00E+00	1,89E-10	1,66E-09	1,34E-11	-2,20E-09
AP	mol H <sup>+</sup> eq.	5,08E-03	3,58E-04	1,44E-03	6,88E-03	0,00E+00	1,98E-05	3,89E-04	2,76E-06	-4,53E-03
EP-freshwater	kg P eq.	2,27E-05	1,34E-06	1,09E-05	3,49E-05	0,00E+00	7,41E-08	6,19E-06	3,23E-09	-2,01E-05
EP-marine	kg N eq.	8,67E-04	8,39E-05	4,55E-04	1,41E-03	0,00E+00	4,63E-06	8,32E-05	4,15E-06	-7,70E-04
EP-terrestrial	mol N eq.	8,49E-03	9,29E-04	4,33E-03	1,38E-02	0,00E+00	5,13E-05	1,11E-03	1,22E-05	-7,54E-03
POCP	kg NMVOC eq.	4,12E-03	5,96E-04	2,13E-03	6,85E-03	0,00E+00	3,29E-05	2,69E-04	5,51E-06	-3,63E-03
ADPm <sup>1</sup>	kg Sb eq.	8,15E-07	5,60E-07	1,64E-06	3,02E-06	0,00E+00	3,09E-08	7,44E-07	8,86E-10	-8,83E-07
ADPf <sup>1</sup>	МЈ	3,11E+01	2,42E+00	8,58E+00	4,21E+01	0,00E+00	1,34E-01	1,36E+00	9,41E-03	-2,77E+01
WDP <sup>1</sup>	m <sup>3</sup> world eq. deprived	8,10E-01	1,01E-02	1,70E-01	9,90E-01	0,00E+00	5,55E-04	1,76E-02	-2,08E-04	-7,19E-01
Caption		GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication - aquatic freshwater; EP-marine = Eutrophication - aquatic marine; EP-terrestrial = Eutrophication - terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential - minerals and metals; ADPf = Abiotic Depletion Potential - fossil fuels; WDP = water use								
Disclaimer		<sup>1</sup> The results o	he results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.							

	ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg of Knudsen Kilen K-Wall									
Parameter	Unit	A1	A2	А3	A1-A3	C1	C2	С3	C4	D
PM	[Disease incidence]	7,35E-08	1,26E-08	2,89E-08	1,15E-07	0,00E+00	6,96E-10	2,83E-09	6,44E-11	-6,52E-08
IRP <sup>2</sup>	[kBq U235 eq.]	1,97E-03	1,12E-03	5,33E-03	8,42E-03	0,00E+00	6,17E-05	1,38E-02	5,95E-06	-2,54E-03
ETP-fw <sup>1</sup>	[CTUe]	3,87E+00	6,59E-01	2,46E+00	6,99E+00	0,00E+00	3,64E-02	5,94E-01	1,17E-02	-3,41E+00
HTP-c <sup>1</sup>	[CTUh]	5,59E-10	1,22E-09	3,45E-09	5,23E-09	0,00E+00	6,74E-11	3,63E-10	2,49E-12	-4,12E-10
HTP-nc <sup>1</sup>	[CTUh]	1,71E-09	1,52E-09	4,72E-09	7,94E-09	0,00E+00	8,39E-11	1,44E-09	2,22E-11	-1,65E-09
SQP <sup>1</sup>	-	2,93E+00	1,46E+00	6,44E+00	1,08E+01	0,00E+00	8,07E-02	2,41E+00	2,28E-02	-3,87E-01
Caption		PM = Partic			Ionizing radiations; HTP-nc = Hu					P-c = Human
		<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.								
Disclaimers		<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.								



	RESOURCE USE PER 1 kg of Knudsen Kilen K-Wall									
Parameter	Unit	A1	A2	А3	A1-A3	C1	C2	СЗ	C4	D
PERE	[MJ]	5,97E-01	4,03E-02	5,20E+00	5,84E+00	0,00E+00	2,22E-03	1,98E+00	2,85E-04	-3,29E-01
PERM	[MJ]	3,67E-01	0,00E+00	2,83E+00	3,20E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	[MJ]	9,64E-01	4,03E-02	8,03E+00	9,04E+00	0,00E+00	2,22E-03	1,98E+00	2,85E-04	-3,29E-01
PENRE	[MJ]	3,11E+01	2,42E+00	8,58E+00	4,21E+01	0,00E+00	1,34E-01	1,36E+00	9,41E-03	-2,77E+01
PENRM	[MJ]	3,67E+01	0,00E+00	-1,13E+00	3,56E+01	0,00E+00	0,00E+00	-3,42E+01	-1,42E+00	0,00E+00
PENRT	[MJ]	6,78E+01	2,42E+00	7,45E+00	7,76E+01	0,00E+00	1,34E-01	-3,28E+01	-1,41E+00	-2,77E+01
SM	[kg]	7,07E-01	0,00E+00	1,49E-01	8,55E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m³]	3,52E-03	3,64E-04	5,68E-03	9,56E-03	0,00E+00	2,01E-05	5,24E-04	1,10E-05	-3,13E-03
Caption		PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water								

	WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg of Knudsen Kilen K-Wall									
Parameter	Unit	A1	A2	А3	A1-A3	C1	C2	С3	C4	D
HWD	[kg]	9,79E-04	6,06E-05	8,72E-04	1,91E-03	0,00E+00	3,35E-06	1,21E-03	7,92E-07	-8,82E-04
NHWD	[kg]	2,49E-02	1,17E-01	2,48E-01	3,89E-01	0,00E+00	6,45E-03	8,61E-03	4,00E-02	-2,17E-02
RWD	[kg]	1,65E-06	7,80E-07	3,97E-06	6,39E-06	0,00E+00	4,31E-08	7,09E-06	3,66E-09	-1,77E-06
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,20E-01	0,00E+00	0,00E+00
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,74E-02	0,00E+00	0,00E+00
EET	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,82E-02	0,00E+00	0,00E+00
Caption		HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy								

		BIOGENIC CARBON CONTENT PER 1 kg of Knudsen Kilen K-Wall
Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0,00E+00
Biogenic carbon content in accompanying packaging	[kg C]	1.02E-01
Note		1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>



### Additional information

#### **LCA** interpretation

The results in accordance with DS/EN 15804+A2 show that the life cycle modules A1-A3 have the largest contribution to all of the 13 core environmental impact categories. The dominant process which contributes the most in the core environmental impact categories is the pre-consumer ABS regrind input in the A1 module. The regrind raw material has the biggest contribution in 9 out of 13 core environmental impact categories for modules A1-A3. The injection moulding of the product in the A3 module has the biggest contribution in one impact category (GWP-luluc). The packaging material of the product has the biggest contribution to Climate Change, biogenic due to the embodied carbon stored in the biogenic packaging material (wood). The transportation of the product from Slovakia to Denmark has the biggest contribution to the core environmental impact categories ODP and ADPm. The EoL has a low impact due to the high share of recycling instead of incineration.

**Technical information on scenarios** 

#### Reference service life

RSL information		Unit
Reference service Life	-	Years

#### End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	1	kg
Collected with mixed waste	-	kg
For reuse	-	kg
For recycling	0.92	kg
For energy recovery	0.04	kg
For final disposal	0.04	kg
Assumptions for scenario development	-	As appropriate

#### Re-use, recovery and recycling potential (D)

Scenario information/Material	Value	Unit
Displaced material	0.294	kg
Waste material incinerated	0.013	kg
Energy recovery from waste incineration, electricity	0.178	MJ
Energy recovery from waste incineration, heat	0.186	MJ

Indoor air

The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.1.

Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.2.



# References

Publisher	<b>L</b> epddanmark	
	www.epddanmark.dk Template version 2025.1	
Programme operator	Danish Technological Institute Gregersensvej DK-2630 Taastrup www.teknologisk.dk	
LCA-practitioner	Michael Granby-Larsen Asger Wendt Karl Nana Lin Rasmussen Sweco Danmark A/S Ørestads Blvd. 41, DK-2300 København S	
LCA software /background data	SimaPro v. 9.6.0.1 Ecoinvent database Version 3.10 LCA-method: Cut-off by classification EF 3.1 is used. EN 15804 reference package 3.1	
3 <sup>rd</sup> party verifier	Guangli Du  BUILD – Institut for Byggeri, By og Miljø, Aalborg Universitet København  Verified according to Verification Checklist 1 v. 2.8	



#### **General programme instructions**

General Programme Instructions, version 3.0, spring 2025 <a href="https://www.epddanmark.dk">www.epddanmark.dk</a>

#### **Technical Rules and Guidelines**

Technical Rules and Guidelines, version 1.0, spring 2025 www.epddanmark.dk

#### EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products"

#### EN 15942

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

#### ISO 14025

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

#### **ISO 14040**

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

#### ISO 14044

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"