


DATASHEET

D-SHAPE STEEL SG

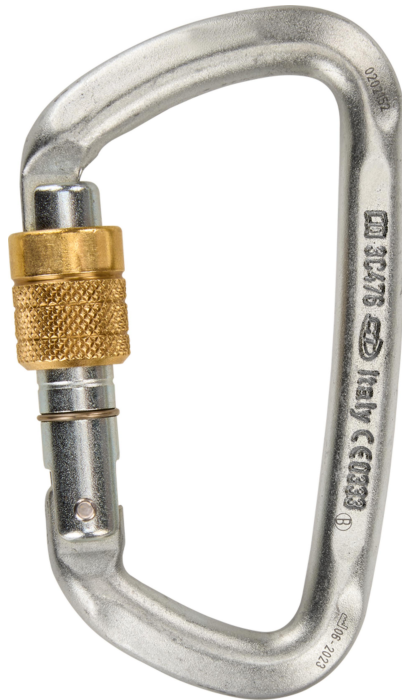

GENERAL

Art.Nr:	H-295-SG	Standards:	EN 12275-B:2013,EN 362-M:2004
GTIN:	8056734830729	Net weight:	0.18 kg
E-class number:	40-02-01-05	Gross weight:	0.18 kg
Customs tariff number:	73269098900003		

DATASHEET

D-SHAPE STEEL SG

Zinc plated steel carabiner with screwgate, ideal for lowering, for work at height and for hauling and rescue maneuvers.

Main features:

- great strength and durability, high work loads;
- zinc-plated finish prevents rust formation in moist environments;
- directional shape to help direct loads on the mayor axis;
- catch-free nose avoids snagging when clipping and unclipping.

FEATURES

Swivel:	No
Carabiner properties:	Corrosion resistance
Application areas:	Various, Arborists, Elevator construction, Emergency, Facades cleaning, Flat roof construction, High Rack storage, High ropes courses, LEAF, Mobile platforms, Mobile Work Platforms, Off Shore Industry, RBA rigging, Rescue, Roofers, Route construction, Scaffolding, Shaft, Steelwork, Telco energy, Wind energy, Working in confined spaces
Fallindicator:	No
Colour:	Silver
Breaking load - lengthways:	50.00 kN
Breaking load - open:	15.00 kN
Breaking load - crosswise:	15.00 kN
Form fit:	Key Lock
Carabiner type:	Type B (EN 12275: 2013), Type M (EN 362:2004)
Maximum lifetime:	30 years
Maximum temperature:	45 °C
Minimum temperature:	-35 °C
Standard ANSI:	No

DATASHEET

D-SHAPE STEEL SG

Standard UIAA:	No
Anti-twist device:	No
Carabiner clasp:	Screw

DIMENSIONS

Opening width:	19 mm
----------------	-------

MATERIAL

Material:	Steel
-----------	-------