


This document is our property and shall not be used for manufacturing or communicated to any other person or company.

Status "No status (Concept)" = only for R&D  
 Status "Working" = prototype / production preparation  
 Status "Pre-release" = tool ordering / pre-series production

Status "Ingen status (Concept)" = endast för R&D  
 Status "Working" = prototyp / produktionsförberedelse  
 Status "Pre-release" = verktygsbeställning / provserie

Denna handling får ej utan vårt medgivande kopieras, delges annan eller på annat sätt obehörigen användas. Överträdelse beivras med stöd av gällande lag.

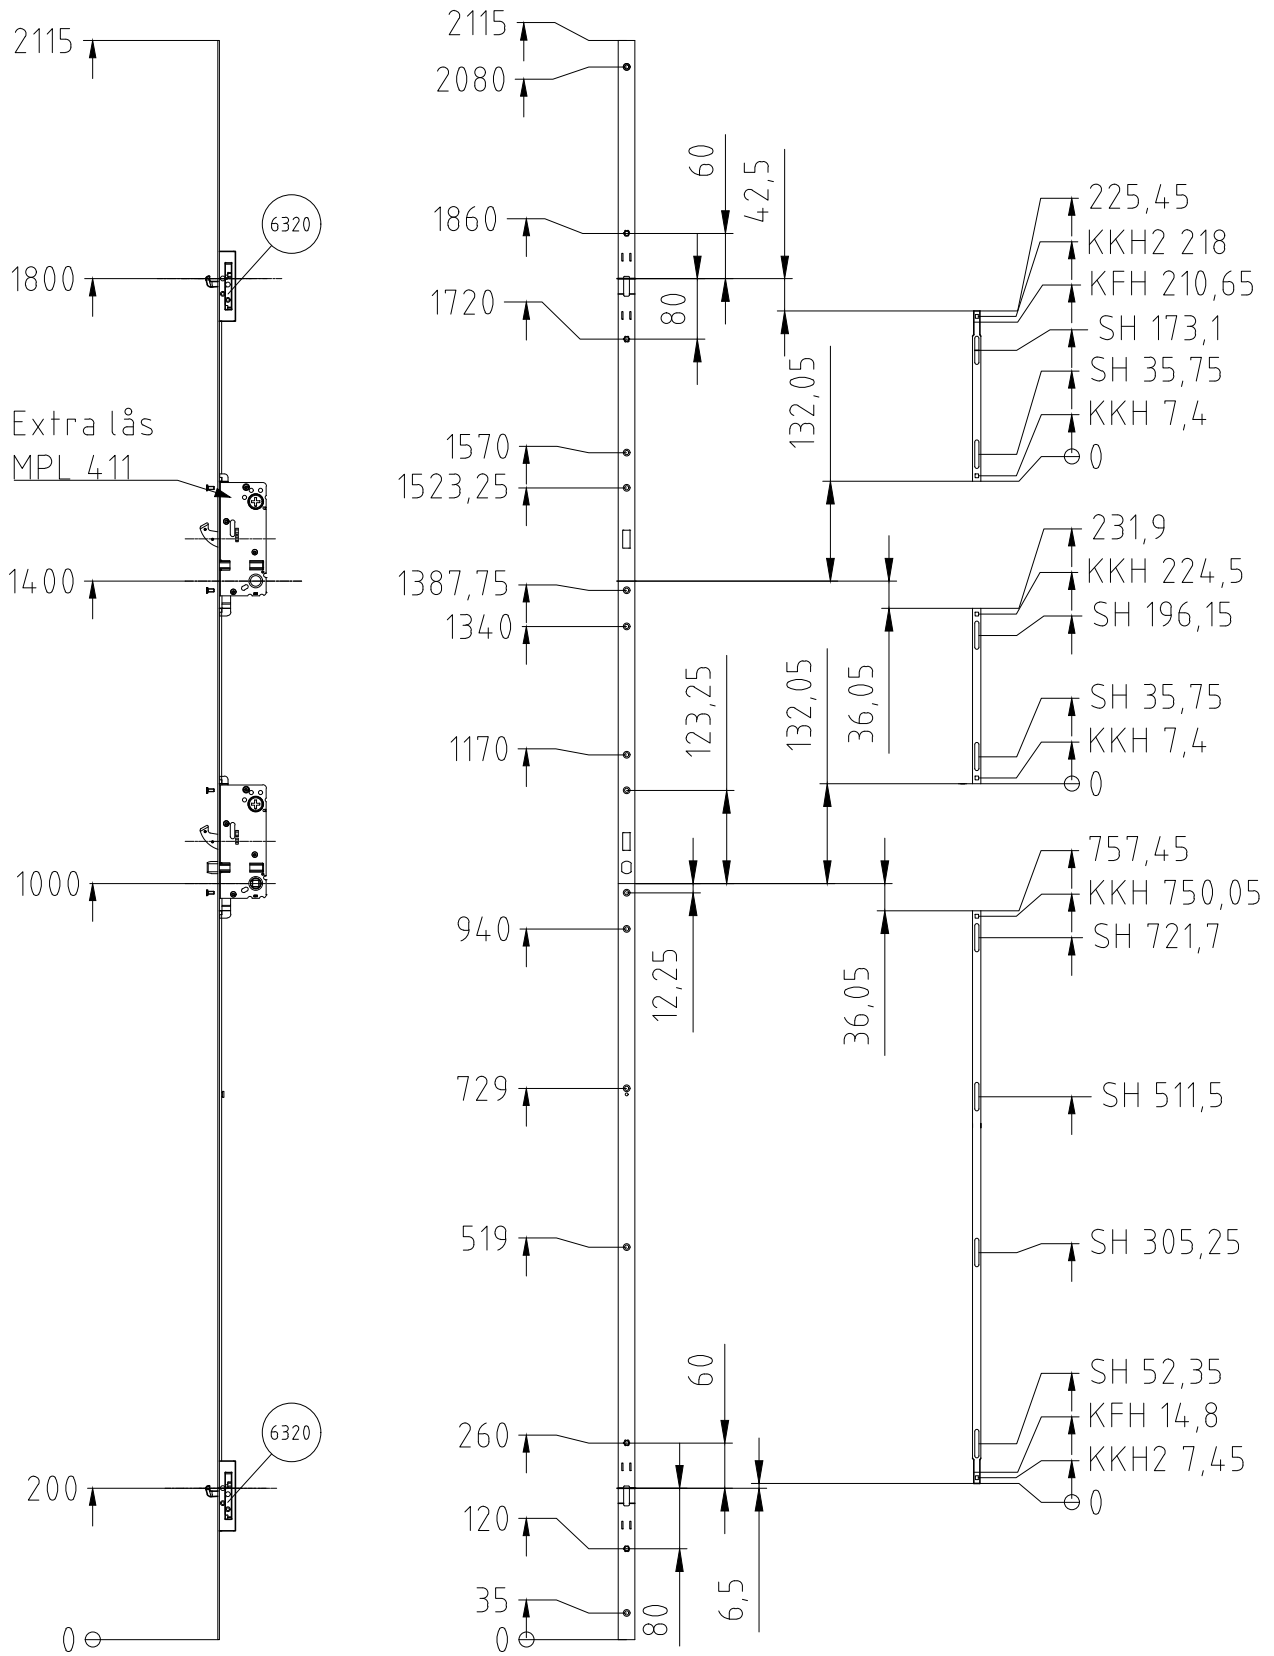

Lock case Connect 410 50dn/64	Face plate 22x2 1.4016	Rod 11x2,9 C9D EN10139 , Hot-dip galvanized	Surface treatment According to EN1670 grade 3
Drawn by I1555 <b>ASSA ABLOY</b>	<b>MULTI-POINT LOCK</b> <b>MPL L=2115 V 360</b>		Projection Scale <b>1:10</b>
<b>Scandinavia</b> ASSA ABLOY SCANDINAVIA	Date 2024-05-14	Customer	Alternate ID (Item number) M5444 002 8003
	Customer item number	Document ID <b>D001511570-001</b>	Revision <b>1</b>

Approved 2024-05-16