






ECO Slide rail EF BG

Product information




■ SYSTEM TECHNOLOGY FOR THE DOOR



ECO Mounting versions


Direct mounting

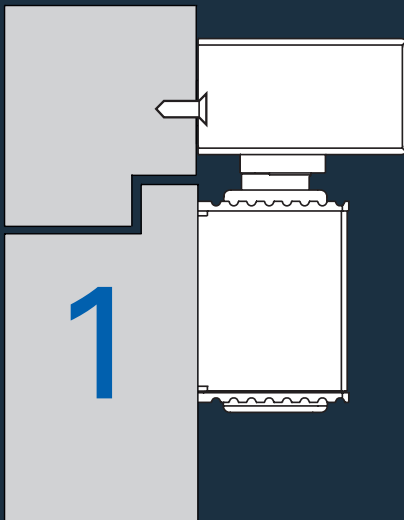

Direct mounting is the standard mounting at ECO. Slide rails is mounted directly onto the door frame. The ECO mounting holes need to be prepared. The respective mounting holes are shown on the next pages.

A paper drilling template is included in each box. Additionally, a metal drilling template or respective mounting holes as PDF or DXF files are available.


Mounting with standard profile

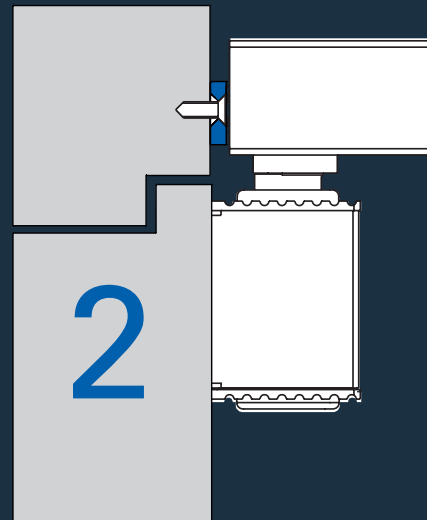

The mounting with the standard profile (SP) is used when the door frame is already equipped with the mounting drill holes 120/428,5 mm - e.g. for steel door frames or when exchanging / retrofitting.

The standard profile is mounted directly to the door frame and adapts the ECO drill holes to the prepared drill holes. It can be ordered separately as accessory.


Mounting with adaptor profile

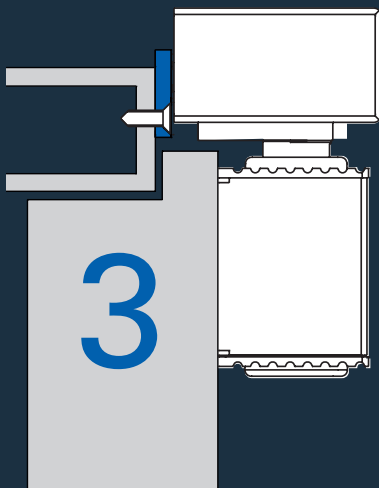

The adaptor profile (ADP) is being used when a stable mounting of the slide rail is not possible due to constructions (e.g. steel frame doors with double rebated notches). The adaptor profile is mounted directly to the door frame. The slide rail can be mounted onto the ADP and will be stable. It can be ordered separately as accessory.

The drilling dimensions for the adaptor profiles are included on the attached paper drilling template. Additionally, a metal drilling template (accessory page) or respective PDF or DXF files containing the dimensions can be available (www.eco-schulte.de)


Mounting with under-lintel angle

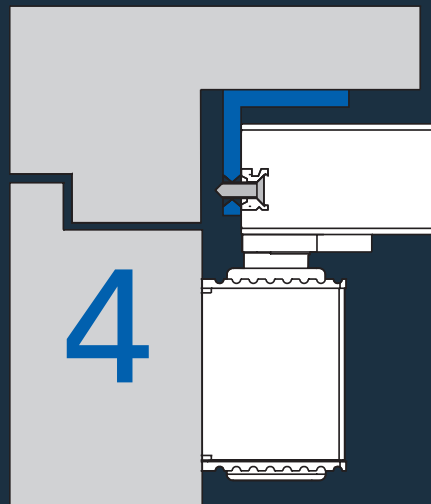


The under-lintel angle (SFW) is being used for installation on the hinge-opposite side if the slide rail needs to be mounted under the door frame (for doors with deep door lintels).

The under-lintel angle is screwed bottom-up to the door frame and the slide rails is fixed to the under-lintel angle.

The drilling dimensions for the SFW are mentioned in the mounting instruction or can be available as PDF or DXF file (www.eco-schulte.de). The under-lintel angle can be ordered separately as accessory.

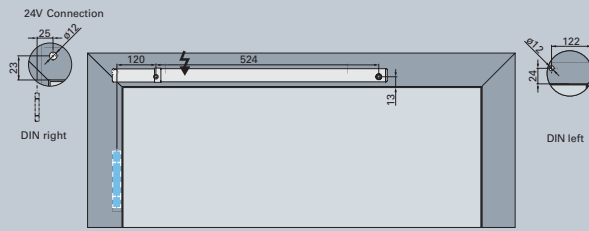

Mounting slide rail EF BG DIN right

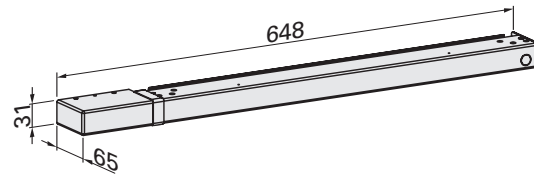

EF BG (Hinge-opposite side)

Slide rail with electromagnetic hold-open hinge-opposite side for ECO Newton TS-61 G, TS-41**

- **Controlled by:** External fire alarm system.
- **Hold open angle:** max. 110°
- **Supply voltage:** 24 V DC
- **Scope of delivery:** Incl. arm for slide rail B for TS-61**
- **Mounting:** Only hinge-opposite side.
- **Slide rail:**
Tested acc. to **EN 1155**


Slide rail EF BG

DIN left	Colour	Article number	DIN right	Colour	Article number
GS-EF BG (Si)	Silver RAL 9006	3501BG000A03511	GS-EF BG (Si)	Silver RAL 9006	3501BG000A03512
GS-EF BG (W)	White RAL 9016	3501BG000E03511	GS-EF BG (W)	White RAL 9016	3501BG000E03512
GS-EF BG (Br)	Brown RAL 8014	3501BG000D03511	GS-EF BG (Br)	Brown RAL 8014	3501BG000D03512
GS-EF BG (S)	Black RAL 9005	3501BG000G03511	GS-EF BG (S)	Black RAL 9005	3501BG000G03512
GS-EF BG (ER M)	Stainless steel satin	3501BG000Q03511	GS-EF BG (ER M)	Stainless steel satin	3501BG000Q03512
GS-EF BG (ER P)	Stainless steel polished	On request	GS-EF BG (ER P)	Stainless steel polished	On request

Accessories slide rail EF BG

DIN left / right	Colour	Article number
Adaptor profile ADP-EF	Steel zinc plated	350300T40000000
Under-lintel angle SFW-EF	Aluminium anodized	350300R40000000

For special dimensions (door leaf thickness, notches) please contact our technical support.

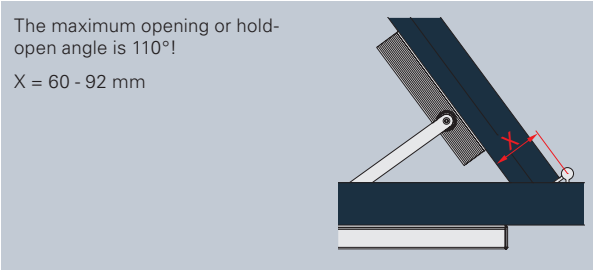

*When using the door closer TS-41, the correct arm has to be ordered.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D - 58706 Menden

Telefon: +49 2373/9276-0
Fax: +49 2373/9276-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change